

ROTARY INPUT FADER UNIT Limited Edition

(INSTALLATION MANUAL)

Head Office

1-18-6 Wakabayashi, Setagaya-ku, Tokyo 154-0023 Japan Web:http://www.vestax.com/

Vestax Global Support csq@vestax.jp

Vestax Europe Support cse@vestax.jp

Thank You for purchasing the Vestax Original Service Parts. Replacement parts only qualified expert. Please read this install manual carefully with SVM Vestax before installation this part for unit.

HOW TO CHANGE THE INPUTFADER UNIT

■Change IF-500 to DF-500

- 1) Rel.Remove the fader knobs. (See fig-a)
- ② Remove the 4 screws which fix the input fader panel to the mixer. (See fig-b)
- ③ Remove the unit IF-500 and reconnect all multi-cables conectors (See fig-d)
- 4 Insert the unit DF-500 and connect all multi-cables conectors and fix the unit with 4 screws the input panel to the mixer (See fig-c/b)
- (5) Replace the fader unit making sure that the connector wires are securely fastened before carefully positioning the fader unit and affixing with screws.

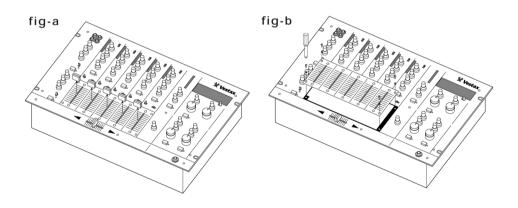


fig-c fig-d



